


# MZ33-AR0

## AMD EPYC 9004 UP Server Motherboard

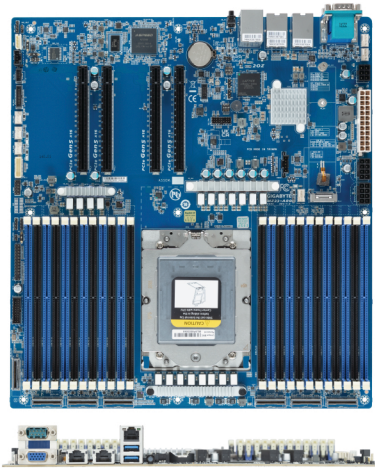

### Features

- AMD EPYC™ 9004 series processors
- AMD EPYC™ 9004 series processors with AMD 3D V-Cache™
- Single processor, 5nm technology
- 12-Channel RDIMM DDR5, 24 x DIMMs
- 2 x 10Gb/s BASE-T LAN ports
- 1 x Dedicated management port
- 7 x MCIO 8i with Gen5/Gen4 NVMe and SATA ports
- Max. 16 x SATA 6Gb/s devices supported
- 1 x M.2 slot with PCIe Gen4 x4 interface
- 4 x PCIe Gen5 x16 expansion slots

### Specification

<b>Form Factor</b>	E-ATX (305W x 330D mm)	<b>Rear I/O</b>	2 x USB 3.2 Gen1, 1 x VGA, 1 x COM, 2 x RJ45, 1 x MLAN
<b>CPU</b>	AMD EPYC™ 9004 series processors AMD EPYC™ 9004 series processors with AMD 3D V-Cache™ Single processor, 5nm technology, cTDP up to 400W Up to 128-core, 256 threads per processor 1 x LGA 6096, Socket SP5	<b>Internal I/O</b>	7 x MCIO 8i connectors, 1 x TPM header, 1 x CPU fan header, 5 x System fan headers, 1 x USB 3.2 Gen1 header, 1 x Front panel header, 1 x HDD back plane board header, 1 x PMBus connector, 1 x IPMB connector, 1 x Clear CMOS jumper, 1 x BIOS recovery jumper, 1 x Buzzer
<b>Chipset</b>	System on Chip	<b>OS Compatibility</b>	Windows Server 2019 / 2022 RHEL 8.6 / 8.7 / 8.8 / 9.0 / 9.1 / 9.2 (x64) SLES 15 SP4 / 15 SP5 (x64) Ubuntu 20.04.6 / 22.04 / 22.04.1 / 22.04.2 / 22.04.3 LTS (x64) VMware ESXi 7.0 Update 3i / 8.0 / 8.0 Update 1 Citrix Hypervisor 8.2 LTSR CU1
<b>Memory</b>	12-Channel DDR5 memory, 24 x DIMM slots RDIMM modules up to 96GB supported 3DS RDIMM modules up to 256GB supported Memory speed: Up to 4800 MHz (1DPC), 3600 MHz (2DPC)	<b>Board Management</b>	Aspeed® AST2600 management controller GIGABYTE Management Console (AMI MegaRAC SP-X)
<b>LAN</b>	2 x 10Gb/s BASE-T LAN ports (1 x Broadcom® BCM57416) NCSI function supported 1 x 10/100/1000 management LAN	<b>PSU Connectors</b>	1 x 24-pin ATX main power connector 2 x 8-pin ATX 12V power connectors 1 x 6-pin ATX 12V power connector
<b>Video</b>	Integrated in Aspeed® AST2600 2D Video Graphic Adapter with PCIe bus interface 1920x1200@60Hz 32bpp, DDR4 SDRAM	<b>Operating Properties</b>	Operating temperature: 10°C to 40°C Operating humidity: 8-80% (non-condensing) Non-operating temperature: -40°C to 60°C Non-operating humidity: 20%-95% (non-condensing)
<b>SATA</b>	2 x MCIO 8i with 16 x SATA ports	<b>Retail Packaging Content</b>	1 x MZ33-AR0, 1 x I/O shield, 1 x Quick start guide, 1 x MCIO 8i to 8 x SATA 6Gb/s cable Single Box dimensions: 409 x 355 x 78 mm
<b>Expansion Slots</b>	4 x PCIe x16 (Gen5 x16) slots 1 x M.2 slot: - M-key, PCIe Gen4 x4, supports NGFF-2280/22110 cards  Total 7 x MCIO 8i connectors ports: - 4 x MCIO 8i connectors for 8 x Gen5 NVMe - 2 x MCIO 8i connectors for 4 x Gen5 NVMe or 16 x SATAIII - 1 x MCIO 8i connector for 2 x Gen4 NVMe	<b>Bulk Packaging Content</b>	10 x MZ33-AR0, 10 x I/O shields Carton dimensions: 600 x 473 x 517 mm
<b>TPM</b>	1 x TPM header with SPI interface Optional TPM2.0 kit: CTM010	<b>Reference Numbers</b>	Retail: 9MZ33AR0MR-000-10* Bulk: 9MZ33AR0NR-000-10*

Engineered by

